

ONLINE AUCTION SALE



Cannabis, Hemp, Lab and Chemical Processing Consignment Auction

PARTIAL LIST OF EQUIPMENT INCLUDES: Hemp Dryers, Evaporator Skids, Rotary Evaporators, Distillation, Centrifuges, Crystallization Chambers, Vacuum Ovens, Homogenizers, Freezers & Ovens, Chillers, SS Jacketed Vessels, Solvent Systems, Temperature Controller Systems, Gas Chromatographs, & Bioreactors – **Equipment Added Daily!**

Bidding Closes: Thursday, November 16, 2023 at 10:00am ET

INSPECTION: Inspection by Appointment Only • Multiple Locations • Set Lot Info. for Details



HAL C1D1 Model 150U Extraction Booth



Parr 0.5 liter 3 Zone Continuous-Flow 3,000 PSI Fixed Bed Tubular Reactor



Root Sciences CryoExs 400 Cro Ethanol Extraction System

Please contact Robert Levy rlevy@rlevyinc.com for additional information,
or go to: www.rlevyinc.com/current-sales or www.solidassetsolution.com/new-projects



905 South Boulevard East, Rochester Hills, MI 48307
www.rlevyinc.com | (248) 710-2133



Sale is being held in conjunction with:
Solid Asset Solutions

Delray Beach | Tampa | Boston | Toronto | Dallas
www.solidassetsolution.com | (561) 257-3022

ONLINE AUCTION SALE – Bidding Closes: November 16

EXTRACTION SYSTEMS

HAL C1D1 MODEL 150U EXTRACTION BOOTH, S/N 150U07190100, Including Fire Suppression, Control Panels, Ductwork and Exhaust Fans, Fixturing, Electrical Installed in or on the Booth and Camera Body Modules, Bizzy Bee Extraction System Including: (2) 5 Column 6x42 Material Columns, (2) 6 Column 8x48 Solvent Columns, 4/5" Mole Sieve 10/12x42, Collection Vessel, 10 Gallon Jacketed Tank, All Tubing, Hoses, Connectors and Ancillary Equipment Associated with the System, (1) Mokon Heater, Model DN2-18AJL, S/N N7019768

ROOT SCIENCES CRYOEXS 400 CRO ETHANOL EXTRACTION SYSTEM, Capacity 400 lbs per 8 hour shift, 350 Liters per hour Solvent Recovery Rate, -40 to -60 Celsius Extraction Temperature Range, Decarboxylation.


COOL CLEAN MODEL BX-62-480-610 EXTRACTION SYSTEM, (2019)



Views of HAL C1D1 Model 150U Extraction Booth



Components of HAL C1D1 Model 150U Extraction Booth

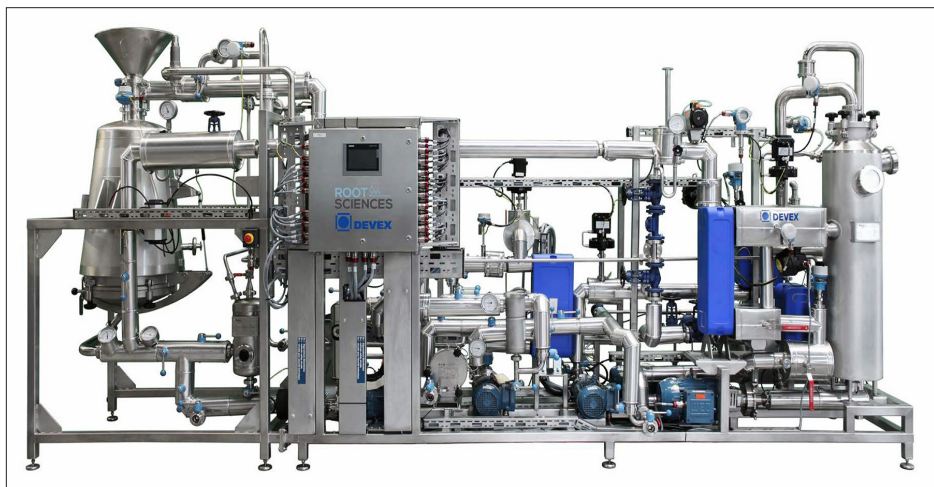

Root Sciences CryoExs 400 Cro Ethanol Extraction System



Cool Clean Model BX-62-480-610 Extraction System

Please contact Robert Levy rlevy@rlevyinc.com
for additional information, or go to:
www.rlevyinc.com/current-sales or
www.solidassetsolution.com/new-projects

Cannabis, Hemp, Lab & Chemical Processing Consignment Auction

REACTORS

PARR 0.5 LITER 3 ZONE CONTINUOUS-FLOW 3,000 PSI FIXED BED TUBULAR REACTOR, Heated Length: 24" (3-Zone), Max Pressure: 3000 psi, Max Temperature: 550° C, Spiral Preheater, Hydrogen Compatible, Includes Controller, Laptop Computer, Hydrogen and Process Flow Pump

PARR 15 LITER 3 ZONE CONTINUOUS-FLOW 1,400 PSI FIXED BED REACTOR, (New, Never Installed), Reactor Tube OD/ID: 5.4"/4.9" x 50", Max Pressure: 1400 psi, Max Temperature: 400° C, Split 3-Zone Electrical Furnace (230 VAC), Gas Feedline with MFC: 0-10,000 SCCM Hydrogen, Liquid Feed Rate: 0-40 ml/min at Max Pressure of 200 psi. Control System: 4871 Process Controller will be Supplied with this System to Provide PC Control of the Heated Zones, MFC Gas Feed, Liquid Feed, Automated Shut-Off Valves and Pressure Control System. The 4871 Controller Includes: (7) Thermocouples, Pressure Transducer, Automated BPR (Back Pressure Regulator), Gas Feed and Purge Line, Liquid Feed Pump, (5) 4875 Power Controllers, Hot Oil Circulator for the Liquid Feed Pump Head, Automated Shut-Off Valve for the Gas Feed and Automated Valve for the Purge Line. Ethernet Connection. SpecView® Software will be Supplied Along with Instructions for Setting it up on a PC. 20' Controller Cables

HIGH PRESSURE STAINLESS STEEL 5 LITER 350° C AGITATED AUTOCLAVE REACTOR, 500 PSIG, External Insulated Ceramic Band Heater, 1/4 HP AC Variable Frequency Drive Motor & Drive with Digital RPM Meter, Shaft Sealing, Zero Leakage Magnetic Drive Coupling. (Maintenance Free), Stirrer, 6 Blade 100-1,750 RPM Vari Speed Turbine Impeller, Standard Fittings. External Fittings: Pressure Gauge, Vent Valve, Safetyrupture Disc, Gas Inlet-Valve & Liquid Sampling Valve Mounted on Common Dip Tube. Internal Fittings: Internal Cooling Coil, Thermowell (with Temp. Sensor), Dip Tube. Gasket, Teflon with Split Clamp Type Quick Opening System. SS Control Panel with Microprocessor Programmable P.I.D. Temp Controller with High Temp Alarm. 575 VAC±10%, 60Hz, Lawler DR-2L Bench Top Pour Point, Cloud Point and CFPP Tester. Operating Temperature Range 0° C to -70° C



Parr 0.5 liter 3 Zone Continuous-Flow 3,000 PSI Fixed Bed Tubular Reactor



Parr 15 liter 3 Zone Continuous-Flow 1,400 PSI Fixed Bed Reactor



High Pressure Stainless Steel 5 Liter 350° C Agitated Autoclave Reactor

OVENS & HEATER

CASCADE SCIENCES MODEL CVO-5 VACUUM OVEN, Part Number 9100993

CASCADE MODEL CDO-28 DRYING AND DECARBOXYLATION OVEN

HUBBEL MODEL NX500-XX GAS FIRED INDUSTRIAL HEATER



Cascade Sciences Model CVO-5 Vacuum Oven



Cascade Model CDO-28 Drying & Decarboxylation Oven



Hubbel Model NX500-XX Gas Fired Industrial Heater

Inspection by Appointment Only – Multiple Locations

CHILLERS & FREEZER


VWR MODEL 1186D 6-8 KG PER DAY CAPACITY RECIRCULATING CHILLER, Temperature Range: -25°C to 150°C, Temperature Stability: $\pm 0.01^\circ\text{C}$, RS-232 Digital Controller, Readout / Accuracy Graphics LCD, $^\circ\text{C}$ or $^\circ\text{F}$ / $\pm 0.25^\circ\text{C}$, Reservoir Capacity: 28 Liters, Cooling Capacity: 700 Watts @ $+20^\circ\text{C}$, 510 Watts @ 0°C , 260 Watts @ -20°C , Heater: 1100 Watt (120V Models), 2200 Watt (240V Models), Pressure Flow Rate: 5-speed (Duplex Pump), 11 to 24 liters/min., Suction Flow Rate: 5-speed, 8 to 18 liters/min. Safety Cutoffs: Adjustable Over-Temperature & Low-Liquid Cutoff, Pump Inlet & Outlet: 1/4 in. FPT Rear Discharge. Working Access (L x W x D): 10-1/4 x 10-1/4 x 10-1/4 in. (26 x 26 x 26 cm), Overall Dimensions (L x W x H): 19-1/2 x 27-1/2 x 18-1/2 in. (49.5 x 70 x 47 cm). 6 Cell Electrolysis Module, 150mm x 150mm Anodes, S.S. Cathodes, Spare Anodes, Circulating Pumps

DELTA SYSTEMS CSPA-0605 60 TON VAR AIR COOLED CHILLER, S/N CSPA-0605, (2019)

AI MODEL C30-40-50L NEGATIVE CHILLER, S/N C30-40-50L-UL220

AI MODEL C30-40-50L NEGATIVE RECIRCULATING CHILLER

(2) SCIENTEMP MODEL 34-20A SUB ZERO FREEZERS

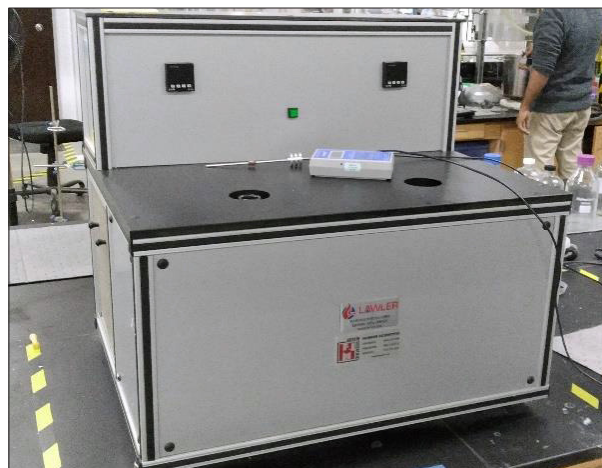

VWR Model 1186D 6-8 kg per day Capacity Recirculating Chiller



Delta Systems CSPA-0605 60 Ton VAR Air Cooled Chiller



AI Model C30-40-50L Negative Chiller



Scientemp Model 34-20A Sub Zero Freezers

PLANTERS

RAIN-FLO MODEL 1200 WATER WHEEL PLANTER
RAIN-FLO 36" WHEEL C SPIKE PLANTER
RAIN-FLO TRYA TOP FOR 1200 PLANTER

MISCELLANEOUS EQUIPMENT

SOLVENT VAP MODEL SE 130 50L ROTARY EVAPORATOR, S/N SE 130-UL220
WELCH MODEL 2052C-02 VACUUM PUMP, S/N 2052.22
WELCH OIL FREE DIAPHRAGM CHEMICAL DUTY PUMP
(2) DIGIVAC MODEL VPC VAPOR PRESSURE CONTROLLERS
CME MODEL ECO-HMS 30 HP HAMMERMILL, w/Auger Base & Discharge, (2019)
CME MODEL HMS MAGNET
CME MODEL VFD NEMA 4X CONTROL PANEL
CME MODEL NEMA 4X CONTROL PANEL STARTER BOX
CROWN VESTIL WORK PLATFORM
SOLVENT VAP MODEL SE120 50L ROTARY EVAPORATOR

FORKLIFTS

CROWN MODEL C-5 5,000# CAPACITY LP FORKLIFT TRUCK
CASCADE FORKS

Please contact Robert Levy
rlevy@rlevyinc.com
 for additional information, or go to:
www.rlevyinc.com/current-sales or
www.solidassetsolution.com/new-projects



Rain-Flo Transplanter



Seeder



Solvent Vap SE 130 50L Rotary Evaporator



CME ECO-HMS 30 HP Hammermill



Crown C-5 5,000# Capacity LP Forklift