

ONLINE AUCTION SALE

Environmentally Responsible and Friendly Farm to Table Grow Facility



SALE INCLUDES: Seed Line, Chillers, Tanks, Pumps, Racking, Filtration, State-of-the-Art Packaging, Refrigeration and Trailers

Bidding Closes: Thursday, August 22, 2024 at 10am ET

INSPECTION: Tuesday, & Wednesday, August 20 & 21, from 10am to 4pm, or By Appointment Only

LOCATION: 50750 E Russell Schmidt Boulevard, Chesterfield, Michigan 48051



2021

Mosa OrloFloro Vivaismo Green Automatic Tray Seeding Line



2021

ProSeal CRO 14 Head Automatic Packaging and Sealing Line



SRC Walk In Cooler



2 Available

Stoughton and Krueger 53' Trailers

Please contact Robert Levy rlevy@rlevyinc.com for additional information, or go to: rlevyinc.com/current-sales or solidassetsolution.com/new-projects

BID ONLINE AT:
BidSpotter



905 South Boulevard East, Rochester Hills, MI 48307
www.rlevyinc.com | (248) 710-2133



Sale is being held in conjunction with:

Solid Asset Solutions

Delray Beach | Tampa | Boston | Toronto | Dallas
www.solidassetsolution.com | (561) 257-3022

PACKAGING

PRO SEAL PACKING AND SEALING LINE - SSI, Inclined 15' Ft Scale Feed Conveyor 16" x 30'Ft, 480 Volts, Ishida Weight System S/N 100512703, (2021), Upstairs 28 Station Fill Station, Mezz Size 12' Ft x 12' Ft x 12'Ft Tall, Intray by Intach Smart Stand Plastic Tray Feed System, Trays 5 3/4" x 8", Capacity 160 Trays/Minute, Servo Driven, 12 Station Fill and Load Stations, Out Conveyor 8" x 21' Ft From Fill Station, Camera System, ProSeal Tray Sealing Machine GTO,Beijer X2 Pro Controller, ProSeal 9" x 10' Ft Belt, S/N SN=M-06303, VideoJet DataFlex 6530 Industrial Thermal Transfer High Speed Printer, S/N-SN-O-05829, EIA THS/MS21 Multi Spectrum Industrial Metal Detector, Belt Size 12" x 60', Dimensions 350mm x 150mm, S/N 33002130153, Sealing Press, and Collection Table 48 Diameter

2021

Replacement Cost \$900,000

Very Few Hours/Hardly Used



ProSeal CRO 14 Head Automatic Packaging and Sealing Line

2021



ProSeal CRO 14 Head Automatic Packaging and Sealing Line

2021



ProSeal CRO 14 Head Automatic Packaging and Sealing Line

ONLINE AUCTION SALE – Closes: August 22 at 10am ET

SEED LINE

MOSA MACHINE ORLOFLORO VIVAISMO GREEN, MOSA SEEDER, DESTACKER, MIXING STATING, FLAT FILLER, SEEDER DRUM, WATERING STATIONS, BUFFER TABLE, Irrigation Spray Conveyor 17-1/2" x 93", Dirt Pack Conveyor 19" x 40", Dirt Bin 42" x 44", Infeeder Hopper 80" x 33" x 45" Tall, Tray loader Conveyor, 20" x 60", Out Roller Conveyor 20" x 118" Long, Seed Conveyor 16" x 81", Seed Boards 15-3/4" x 47", with Skids of Seeding Boards 15 3/4" x 47", (2021)

GGs EBB AND FLOOD HYDROPONIC GROW TABLES, 55' Ft Long Tables, 48" Wide, 3 Levels, with Pump and Drive System, Multi-Tier Aluminum Benches
SKIDS OF METEOR BOARDS, Seed Trays 15-3/4" x 47" x 1", 96 Holes Per Board

(9) DWC STEEL FRAME POND WALLS, Pond Size 150'x 27' x 12"
1 ROLL OF POND LINER, 150'x 27' x 12"

(2) GROWLINK PRECISION IRRIGATION CONTROLLERS, 4 Irrigation Valve Outputs, Compatible, with Terralink, Teros 12 or Acclima TDR Sensors, 4 Zone Base Controller, Run up to 4 Standard 24 Volt Solenoids at Once, Unlimited Sensor Triggers, Timers and Schedules, Connects to the Growlink Cloud, Volumetric Water Content, Soilless Media Calibration: 0.0-1.0 m3/m3, Apparent Dielectric Permittivity 1 (air) to 100 (Water), Accuracy +- 0.02 for 0-53%; +-0.04. for 53-100% in any Porous Medium, Temperature Range -40C - 85C, Resolution 0.10C, Accuracy, +-0.4C From -40 to 0 -+ 0.3 from 0 to +85 C



Mosa OrloFloro Vivaismo Green Automatic Tray Seeding Line



GGs Seed Tray Conveyors



Dry Hydroponics Seed Trays



Grow Ponds



Grow Ponds



Partial Views of Spare Parts for Ponds





ENVIRONMENTALLY RESPONSIBLE AND FRIENDLY FARM TO TABLE GROW FACILITY

CHILLERS

CHILLX HORIZONTAL 30 TON WATER CHILLER, MODEL GC150CK4, Power Supply 460 Volts, 3Ph, 60Hz, Compressor #1 460 Volts, 3Ph, 10.6 FLA, 66.1 LRA, Compressor #2 460 Volts, 3 Ph, 8.2 FLA, 75 LRA, Condenser Fan 1, 1/2 HP, 460 Volts, 1 Ph, 2.3 FLA, Condenser Fan 2, 1/2 HP, 460 Volts, 1 Ph, 2.3 FLA, Water Pump 1 HP, 460 Volts, 1 Ph, 1.8 FLA, Minimum Circuit Ampacity 27 Amps, Max Fuse Size 36 Amps, Factory Charged Circuit #1 160 OZ R-410A, Factory Charged Circuit #2 160 OZ R-410A, Test Pressure 446 PSIG High Side 236 PSIG Low Side, Outdoor Use, Short Circuit Current 24 KA rms symmetrical 240 V Max, S/N CK21E3559, (2021)

DAIKIN MANUFACTURING 5 TON CHILLER, MODEL DX13SA0603AE, Condenser Fan Motor Horsepower 1/4", Cooling Capacity 60,000 Btu/h, Nominal Cooling Capacity 5 Ton, Sound Level 72 dB, Valve Type Sweat, Refrigerant Charge 130 OZ, Piston Size 0.086, Series DX13S, Refrigerant Used R-410A, 208-230 AC Volts, 3 Ph, 60 Hz, Voltage Range Min 197, Max 253, Max Fuse Amps or Max Circuit Breaker 35, Min Circuit Amps 21.3, Fan Motor FLA 1.3-1/4 HP, Compressor RLA 16, LRA 110, Short Circuit Current 5kA RMS Symmetrical, 600 Volt Max, Max Working Pressure PSIG 111, Factory Test Pressure PSIG Low 240, High 450, Liquid Line Size OD 3/8", Suction Line Size OD 1-1/8", Liquid Valve Size OD 3/8", Suction Valve Size OD 7/8", Electrical Conduit Size 1/2" or 3/4", Parallel Unit Minimum Clearance 24", Unit Minimum Clearance 12", Unit Top Minimum Clearance 60", Lower Access Panel Depth 4", Lower Access Panel Height 17", Lower Access Panel Width 7", Unit Size 35-1/2" x 35-1/2" x 38-1/4" Tall

(2) LIEBERT CORP, MODEL 6540, 4 Fan Microchannel Condenser Units, 460 Volts, 3 Ph, 60 Hz, 12 FLA, Min CKT Amps 28, Max Fuse Amps 15, Fan Speed Control Motor Data 230 Volts, Single Phase, 60 Hz, 4.88 FLA, 3/4 HP, Auxiliary Motor Data, 460 Volts, 3 Ph, 60 Hz, 3.4 FLA, 1 HP, Working Pressure 400 PSIG, Suitable for Outdoor Use, Suitable for R-12, R-22, and R-500, S/N 26980-6 & 26982-4



ChillX 30 Ton Water Chiller



Daikin Manufacturing 5 Ton Chiller

2021

TANKS

24M3 CAPACITY WATER HOLDING TANK, Galvanized Steel Plate, 0.6 mm PE Liner, with Cole Palmer AO-74127-35 Remote Control Pump, with GFRPP Head, 4.3 GPH, 230 VAC, 50 H

5,000 GALLON WATER HOLDING TANK, Nursery Room, with VLT Aqua Inverter Drive, 3.5 Amp, 3 Ph, 200-240 Volt

PUMPS

OVERHEAD IRRIGATION PUMP SET, with VFD, Pressure Tank and Low Pressure Sensors, Weg W22 Premium 5.5 HP Pump Motor Max RPM 3510, Vacon Inverter, Vacon01000-#L-0009-5-Flow Meter, UdImatic Hydraulic Filter Model 851D03F-SAC-UDI, Max Press 10 Bar/150 PSI, Min Press 2 Bar / 30 PSI, IN/Out FL 3" ISO, Screen 130 Micron, Power Single Phase, 220 Volts, 50 Hz, (2020), UDI Self Cleaning Filter, with Control Panel and Two Tanks 39" Diameter, 40" Tall

(3) POND CIRCULATION PUMP SETS, with Motor Controller and Low-Pressure Sensors, Weg 5.5 HP Pump Motor, Max RPM 3515, with UDI Suction Filter, Cole Palmer AO-74127-35 Remote Control Pump, with GFRPP Head, 4.3 GPH, 230 VAC, 50 Hz, with Control Panel and Two Tanks 39" Diameter, 40" Tall



Views of Irrigation Systems



Holding Tank



Peet and Growing Supplies

ONLINE AUCTION SALE – Closes: August 22 at 10am ET

FILTRATION

(5) DRYGAIR DGX 360 AIR CIRCULATION DEHUMIDIFIER UNITS, Water Extraction 4.5 G/H, Air Circulation 4,000 CFM, PS Max 28/400 Bar / PSI, Refrigerant R-410A, Drying Capacity 4.5 G/h, Quantity 8.8 Kg, Temp Controller, Humidity Controller, Optimal F Degree Range 55 – 95F Degrees, Water Extraction Efficiency 0.87g/kWh, Total Weight 320 Kg, 230 Volt, Single Phase, 60 Hz, Max 35 Amps, Input Watts 4800, S/N 007X4001019 / 007X4001020 / 007X4001018 / 007X4001006 and 007X4001015
AQUA-HORT COPPER FILTER, Pythium, Fusarium Control, 110 Volt, Portable, on Wheels, Very Few Hours



5 Available

DryGair DGX 360 Air Circulation Unit



7 Available

1 of 7 Exhaust Fans

RACKING

(8) SECTIONS OF PALLET RACKING, (34) 12' Ft Crossbeams, (11) 48" x 16' Ft Uprights
(3) SECTIONS OF PALLET RACKING, (18) 8' Ft Crossbeams



Pallet Racking



24 Available

Partial View of 24 Ceiling Fans

REFRIGERATION

BASIL AND LETTUCE SRC REFRIGERATION WALK IN COOLERS, Reaches 34 Degrees F, Dimensions are 87 ft x 39 Ft x 16 Ft Tall Ceilings, (2) Heatcraft Model LCH0070MCACZC0753 Condensing Units, 208 - 230 Volts, 3 Ph, 60 Hz, and (2) 2 Fan Walk In Unit Coolers Units Heatcraft Model LEM0475B67AM-AB0200, 208 -230 Volt, 1 Ph, 60 Hz, 2 - 1/4 HP, Electric Defrost, FPI 6, Dual Rated True, No. of Fans 3, Rated Point F- 10F TD -20F SST, Refrigerant co2, Application Capacity 43,000, CFM 6,500, Height 28 5/8", Depth 20 1/4", Length 95.7/8", Net Weight 288 Lbs, Fins Per Inch 6, Motor Type 1 Speed EC, Motor HP 1/4", Unit MCA 15, Unit MOPD 20, Motor Voltage 208-230/1/60, Motor Watts 625, Motor Amps, 5.2, Defrost Heater Voltage 208-230/3/60, Defrost Heater Amps 23.2, Defrost Heater Watts 7750, Coil Inlet OD 2-Jan, Suction OD 2-Jan, External Equalizer OD N/A, Drain MPT 4-Mar, Fan Diameter 457mm, Air Throw Standard 60 Ft, Air Throw Standard 18.5m, Air Throw, with Collar 45 Ft, Air Throw, with Collar 14, FPI 6, S/N T21021517 / T21021566, (1) 4 Fan Walk In Unit Cooler, Haet craft Model LEC0250A67AMAB0200 115 Volt, 1 Ph, 60 Hz, 4 Fans, -1/20 HP, FLA EA 0.9, MCA 3.6, MOPD 20, with IntelliGen Evaporator Controller, (2) Big Sliding Doors and (3) Man Doors



SRC Walk In Cooler

TRAILERS

53' FT STOUGHTON MODEL AVW-535T-S-C-AR VAN TRAILER, Aluminum Sheet & Post, Length 53', Width Overall – 102"; Inside 98-1/2", Height Overall 13'6" Based on 47" 5th Wheel Height Inside Front – 110" Inside Rear – 110" Door Opening – 109 – 7/8" Dock Height – 49-1/2", Capacity 20,000 Lb Brake Rating per Axle, Suspension, Ridgid Trailing Arm Style Air Suspension, with EZ Align Axle Alignment and an External Dock Lock to Minimize Dock Walk, Axle Tapered Spindles and Bearings, with Pro-Torq Axle Nuts, Wheels and Hubs, 22.5" x 8.25" Hub-Piloted Steel Disc, 5 Hand Hole and Powder Coated White, 10 Stud Hub Piloted, with Cast Iron Drums, 11-1/4" Bolt Circle, Tires (8) 295/75R22.5 PSI: 95 / 655 Kpa GVWR 31,744 Kilograms, 70,000 Lbs, VIN 1DW1A53213S612416

53" FT KRUEGER VAN TRAILER, Aluminum Sheet & Post, Length 53', Width OverOverall – 102"; Inside 98-1/2", Height Overall 13'6" Based on 47" 5th Wheel Height Inside Front – 110" Inside Rear – 110" Door Opening – 109 – 7/8" Dock Height – 49-1/2", Capacity 20,000 Lb Brake Rating per Axle, Suspension, Ridgid Trailing Arm Style Air Suspension, Wheels and Hubs, 22.5" x 8.25" Hub-Piloted Steel Disc, 5 Hand Hole and Powder Coated White, 10 Stud Hub Piloted, with Cast Iron Drums, 11-1/4" Bolt Circle, Tires (8) 295/75R22.5 PSI: 95 / 655 Kpa



2 Available

Stoughton and Krueger 53' Trailers

MATERIAL HANDLING

5,500 CAP PALLET JACK • 1/2 YARD STANDARD SELF DUMPING HOPPER

SHOP AND FACTORY

DRAMM AUTOFOGGER, LVH-15NS, Treats 30,000 Square Ft, Treats 70,000 Sq Ft, with Additional Fans, Fogger Head Separates from Control and Compressor Carriage for Portable Use, 230 VAC, 2.7A, 60Hz, 1PH

10" RYOBI PORTABLE TABLE SAW, with Detachable Stand, RTS23, 120Volt, 60 Hz, 15 Amps, w/Detachable Stand, 5,000 RPM, 10" Blade, with Accessories and (2) Saw Blades

(15) ASSORTED SUMP PUMPS • (18) WALL MOUNTED CEILING FANS
WHIRLPOOL STAINLESS STEEL REFRIGERATOR • STAINLESS STEEL SINK

OFFICES

EXECUTIVE OFFICES • OFFICE CUBICLES • COMPUTERS & MONITORS




Whirlpool Stainless Steel Refrigerator



Stainless Steel Sink




Conference Table and Chairs

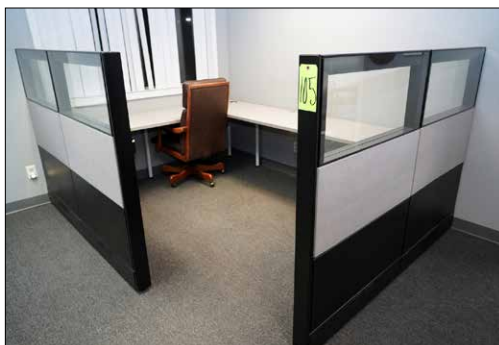

Office Cubicles



Executive Office Furniture

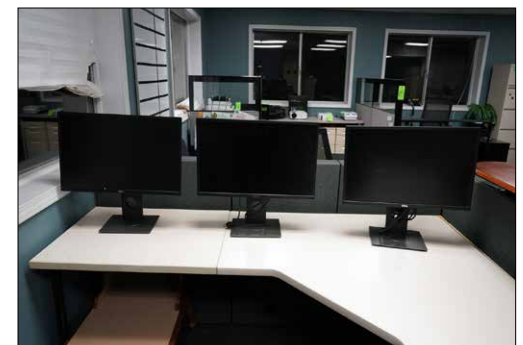

Computers and Monitors